


GENERAL - STEAM BOILERS
NATURAL GAS FIRED

SERIES GBS M1-LN*
***LN for Low Nox**

VERTICAL MARINE SERIES MODEL GBS- M1- 6, 7.5, 9.5, 10, 15 (Available 20, 30, 40 & 50 HP)

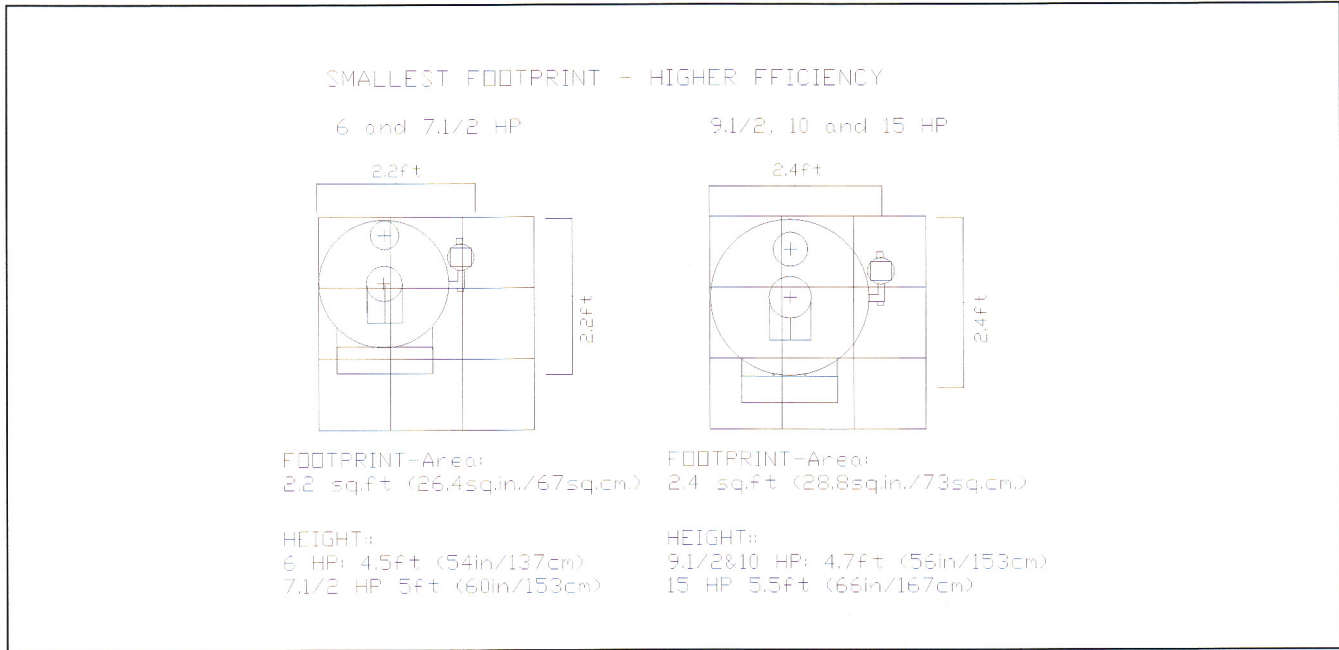


THERMAL EFFICIENCY to 82 %

9.5/10

MODEL GBS-M3-SM NAT. GAS (dim. in Inches)		HP 6	HP 7.5	HP 9.5	HP 15			
input	BTU INPUT 1,000 BTU PER HOUR	260	315	399	630			
	BTU OUTPUT (efficiency to 82%)	213	258	327	517			
	POUNDS-STEAM PER HOUR LB/HR	207	259	345	518			
WOA	WIDTH OVERALL (WITH LEVEL CONTROL)	26	26	29	29			
LOA	LENGTH (DEPTH) INCLUDING CONTROLS(w/burner)	26	26	29	29			
HOA	HEIGHT OVERALL W/ CONTROLS	54	60	56	66			
vent	VENT STACK DIAMETER (Type B Vent)	5	6	8	8			
gas	GAS INLET SIZE - STD. NATURAL GAS	.75	.75	.75	1			
	NAT. GAS MANIFOLD PRESSURE VARIABLE 3 - 4"wc							
	GAS SUPPLY PRESSURE 6 to 12 IN. W.C.							
cfh	BTU INPUT in CF/HR BASED IN 1000 BTU/CF	260	315	399	630			
stm	STEAM OUTLET CONNECTION 50 to 250 PSI	1	1	1	1			
	STEAM OUTLET CONNECTION - LOW PRESS.(15psi mod)	1.5	1.5	1.5	1.5			
s v	SAFETY RELIEF VALVE DISCHARGE 100 PSI	1	1	1	1			
	SAFETY RELIEF VALVE DISCHARGE 125, 150, 250 PSI	1	1	1	1			
	SAFETY RELIEF VALVE DISCHARGE 15 PSI	1	1	1.5	1.5			
w in	WATER INLET SIZE	.75	.75	.75	.75			
	WATER COLUMN DRAIN SIZE	.75	.75	.75	.75			
bd	BLOWDOWN OUTLET SIZE	1	1	1	1			
ele	CONTROLS-ELECTRICAL = 115 V.1Ph 16 AMPS.							
	PUMP-ELECTRICAL (2 POLES RELAY SUPPLIED)							
wt	NET WEIGHT (APPROXIMATED) LB.	750	850	1000	1200			
	CRATED SHIPPING WEIGHT (APPROXIMATED) LB.	800	900	1100	1300			

General Boiler Co., Inc. 1546 East Adams Blvd., Los Angeles, CA 90011 USA

Tel. 323/233-1005 Fax 323/233-1425 E-mail: sales@generalboiler.com URL: www.generalboiler.com



excel/VT MARINE 6 to 15 HP '07 brochure